

NEW



DESIGNED FOR THIN PLATE LIFTING

Ultralift TP™

OPERATING INSTRUCTIONS



The lifter is in the OFF position



To Switch the lifter ON
Rotate the handle 120° anti-clockwise. Ensure the lever is securely locked in place before commencing with the lift.



The lifter is in the ON position



To Switch the lifter OFF
Return the load to the floor or support. Depress the plunger on the handle and rotate 120° clockwise to its stop position.



Release the plunger to complete the switching process

Why Thin Plate Lifters?

Thin plate cannot accept the magnetism from standard lifting magnets.

Using standard lifters on thin plate results in:

- Dramatically reduced performance
- Picking multiple sheets
- Un-safe lifts

Ultralift TP offers:


- A lifter designed for thin plate lifting – offers safe lifting
- SWL based on material thickness
- Guaranteed lifting of single plates
- Simple quick operation
- Two sizes in the range: TP150 and TP300. Larger plates will require two lifters on a spreader beam

Spreader Beams

Eclipse Magnetics supply a range of spreader beams. These ensure safe lifts are made at all times on longer products. We also produce equipment for allowing the lifting magnets to lift through 90 degrees.

Special Lifting and Automation

Eclipse Magnetics produce a full range of pneumatic and electro-permanent lifting equipment that is specifically designed for special applications.

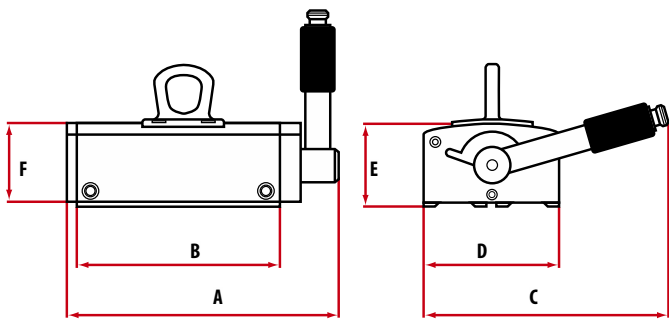

Model No	Self Weight (kg)	Dimensions (mm)						Material Thickness (mm) 5		Material Thickness (mm) 6		Material Thickness (mm) 8		Material Thickness (mm) 10	
		A	B	C	D	E	F	SWL (kg)	Length Max (mm)	SWL (kg)	Length Max (mm)	SWL (kg)	Length Max (mm)	SWL (kg)	Length Max (mm)
TP150	8	202	150	181	100	126	74	75	1500	100	1500	150	1500	200	1500
TP300	15	352	300	181	100	126	74	150	2000	200	2000	300	2000	400	2000

Eclipse Magnetics Limited
Units 1-4 Vulcan Road
Sheffield S9 1EW
England

T: +44 (0) 114 225 0600
F: +44 (0) 114 225 0610
E: sales@eclipse-magnetics.co.uk